

10/13/99  
Jc714 U.S. PTO

PTO/SB/05 (12/97)

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.63(b))

Attorney Docket No. **TI-28505**  
First Named Inventor or Application Identifier **Simon Joshua Jacobs**  
Title **Getter for Enhanced Micromechanical Device Performance**  
Express Mail Label No. **EL 071337873US**

## APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents

1. ☒ \*Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages **20**]  
(preferred arrangement set forth below)  
- Descriptive title of the Invention  
- Cross References to Related Applications  
- Statement Regarding Fed sponsored R&D  
- Reference to Microfiche Appendix  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC d113) [Total Sheets **1**]
4. Oath or Declaration [Total Pages **1**]  
a. ☒ Newly Executed (original or copy)  
b. ☐ Copy from a prior application (37 CFR §1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]  
i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s)  
named in the prior application,  
see 37 CFR §1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of  
the oath or declaration is supplied under Box 4b, is considered as  
being part of the disclosure of the accompanying application and is  
hereby incorporated by reference therein.

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
a. ☐ Computer Readable Copy  
b. ☐ Paper Copy (identical to computer copy)  
c. ☐ Statement verifying identical of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & Documents(s))
9. ☐ 37 CFR §3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☒ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ \*Small Entity Statement(s) ☐ Statement filed in prior application  
(PTO/SB/09-12) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)  
if foreign priority is claimed
16. ☐ Other:

\*A new statement is required to be entitled to pay small entity fees, except where one has been filed in a prior application and is being relied upon

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No:

Prior application information: Examiner Group / Art Unit:

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

NAME	<b>Charles A. Brill</b>		
	<b>Texas Instruments Incorporated</b>		
ADDRESS	<b>P.O. Box 655474, MS 3999</b>		
CITY	<b>Dallas</b>	STATE	<b>Texas</b>
		ZIP CODE	<b>75265</b>
COUNTRY	<b>USA</b>	TELEPHONE	<b>972-917-4379</b>
		FAX	<b>972-917-4418</b>

Name (Print/Type)	<b>Charles A. Brill</b>	Registration No. (Attorney/Agent)	<b>37,786</b>
Signature	<i>Charles A. Brill</i>	Date	<b>10/12/99</b>

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Simon Joshua Jacobs

Serial No.: TBD

Filed: Herewith

For: Getter for Enhanced Micromechanical Device Performance

Docket No.: TI-28505

Art Unit: TBD

Examiner: TBD

PRELIMINARY AMENDMENT

October 12, 1999

Assistant Commissioner for Patents

Washington, D. C. 20231

<b>MAILING CERTIFICATE UNDER 37 C.F.R. §1.8(A)</b>	
I hereby certify that the above correspondence is being deposited with the U.S. Postal Service as First Class Mail in an envelope addressed to: Assistant Commissioner For Patents, Washington, D.C. 20231 on the date below.	
<i>Sue Short</i>	<i>10/13/99</i>
SUE SHORT	Date

Dear Sir:

Please amend the above-referenced application as follows:

IN THE SPECIFICATION:

Page 1: before line 1, insert --This application claims priority under 35 USC § 119(e)(1) of provisional application number 60/105,269 filed 10/22/98--.

IN THE CLAIMS:

Page 17, line 14, change the second consecutively numbered claim "41" to claim number --42--.

**REMARKS**

Entry of the foregoing amendment prior to examination is respectfully requested.

If the Examiner has any questions or other correspondence regarding this application, Applicant requests that the Examiner contact Applicant's attorney at the below listed telephone number and address.

Respectfully submitted,



Charles A. Brill  
Attorney for Applicant(s)  
Reg. No. 37,786

Texas Instruments Incorporated  
P.O. Box 655474, MS 3999  
Dallas, Texas 75265  
Telephone: (972) 917-4379  
Fax: (972) 917-4417/4418

# GETTER FOR ENHANCED MICROMECHANICAL DEVICE PERFORMANCE

## CROSS-REFERENCE TO RELATED APPLICATIONS

The following patents and/or commonly assigned patent applications are hereby

5 incorporated herein by reference:

Patent No.	Filing Date	Issue Date	Title
5,061,049	Sept. 13, 1990	Oct. 29, 1991	Spatial Light Modulator and Method
5,331,454	Jan. 16, 1992	July 19, 1994	Low Voltage Reset Process for DMD
5,583,688	Dec. 21, 1993	Dec. 10, 1996	Multi-Level Digital Micromirror Device
10 08/833,166	April 4, 1997		Micromechanical Device Including Time- Release Passivant
08/971,810	Nov. 17, 1997		Monolayer Lubricant for Micromachines
15 60/xxx,xxx	Sept. 30, 1998		Surface Treatment Material Deposition and Recapture

## FIELD OF THE INVENTION

This invention relates to the field of getters or desiccant compounds, particularly to moisture and particulate getters for micromechanical devices and electronic enclosures.

## BACKGROUND OF THE INVENTION

Electronic devices such as integrated circuits are often packaged in hermetically sealed  
20 enclosures. These enclosures protect the device from contaminants, particles, and water vapor that would otherwise enter the package and mechanically damage or electrically disrupt the device. The hermetic packages, however, do not perfectly seal out these elements over the life of

the device. Additionally, some water vapor and debris is present in the enclosure cavity when the enclosure is sealed, or evolved by the packaging materials as the materials cure.

Getters, compounds that capture contaminants, moisture vapor, and particles, are included inside the device enclosures to trap these species and preclude degradation of device performance, thereby increasing the operational lifetime of the device. Various getter compounds are available depending on the environment to which the getter will be subjected.

Existing getter compounds are unsatisfactory for use with many modern micromechanical devices. Micromechanical devices are small structures typically fabricated on a semiconductor wafer using techniques such as optical lithography, doping, metal sputtering, oxide deposition, and plasma etching which have been developed for the fabrication of integrated circuits. Typical micromechanical devices include accelerometers, pressure sensors, micro-motors, and micromirrors.

Because of their small size, often less than 100 microns, micromechanical devices are very susceptible to damage from debris inside the micromechanical device package. For example, debris can easily obstruct the motion of, or electrically short-circuit, micromirror elements which are often no larger than 17 microns.

Many micromechanical devices include moving components that place unique demands on surface lubrication and passivation systems. For example, the deflectable element of a micromirror device rotates about a torsion beam hinge axis and is stopped by contact with a landing zone or spring structure. The contact point experiences metal-to-metal contact and some scrubbing action. This metal-to-metal contact can create sticking and friction (stiction) between the moving components. Stiction is caused by the capillary action of water vapor present on the

surface, van der Waals attraction, and intermetallic bonding of the metals. Stiction becomes worse as the contacting surfaces wear against each other since the contact area is increased.

Passivation coatings on micromirror devices reduce stiction and wear between the contacting surfaces. One passivation material that is especially useful for micromirror devices is a perfluoroalkanoic acid such as perfluorodecanoic acid (PFDA). PFDA, as taught by U.S. Patent 5,331,454, issued July 19, 1994 and entitled Low Voltage Reset for DMD, provides an oriented monolayer on the surfaces of the DMD. The oriented monolayer provides a chemically inert surface that reduces the stiction between adjacent metal parts.

Unfortunately, the PFDA forms a relatively weak bond between with the aluminum surfaces on which it is deposited. Because of the weak bond between the PFDA and the aluminum surfaces of the micromirror device, the scrubbing action between contacting parts wears the oriented monolayer and exposes the underlying aluminum. Without replenishment, exposed aluminum regions grow and eventually create unacceptably large stiction forces—ruining the device. Additional PFDA, however, cannot simply be included in the package since the excess PFDA will condense in crystalline form on the working surfaces of the device, thereby forming particles that obstruct the free operation of the device and causing catastrophic device failure. What is needed is a method and system of replenishing the passivation layer on the micromechanical device while trapping water vapor present in the package that does not introduce particulate PFDA into the package.

## SUMMARY OF THE INVENTION

Objects and advantages will be obvious, and will in part appear hereinafter and will be accomplished by the present invention which provides a method and system for a getter, or desiccant compound, for enhanced micromechanical device performance. One embodiment of the claimed invention provides a desiccant compound able to reversibly absorb a carboxylic acid passivation material. The desiccant compound comprises a polymer binder selected from the group consisting of polysaccharides (including structural polysaccharides such as cellulose, chitin, their functionalized derivatives, and others well known to practitioners of the art), polyamines, polyamides, and polysulfones, and a drying agent dispersed in the binder. The polymer to drying agent weight ratio is 1:2.1 to 1:100. According to another embodiment, the polymer to drying agent weight ratio is 1:4 to 1:10. According to one embodiment, the drying agent typically is a zeolite such as a molecular sieve.

According to one embodiment, the desiccant compound further comprises a solvent. The weight ratio of the combined polymer and drying agent to the solvent is 2:1 to 1:100, or optionally 1:1 to 1:10. by application of such a formulation followed by evaporation of the solvent (curing), a dry desiccant compound is obtained having a polymer to drying agent weight ratio of 1:2.1 to 1:100. It is understood that some traces of solvent may remain after the curing process. This curing process may occur at room or elevated temperature, with or without a vacuum to assist in removing the solvent.

According to one embodiment the polymer is hydroxypropylcellulose. According to another embodiment the polymer is poly(vinylpyrrolidone). According to yet another embodiment, the polymer is poly(2-vinylpyridine), poly(4-vinylpyridine), or a copolymer of 2-vinylpyridine and 4-vinylpyridine. According to yet another embodiment the compound further

comprises a carboxylic acid passivation material such as a perfluoroalkanoic acid, for example perfluorodecanoic acid absorbed by said polymer.

The disclosed invention also provides a device comprising a micromechanical machine, a package enclosing the micromechanical machine, and a desiccant compound able to reversibly absorb a carboxylic acid passivation material enclosed by said package. The desiccant compound comprises a polymer binder selected from the group consisting of polysaccharides, polyamines, polyamides, and polysulfones and a drying agent dispersed in said binder at a polymer to drying agent weight ratio of 1:2.1 to 1:100.

According to another embodiment of the disclosed invention, a method of applying a desiccant compound able to reversibly absorb a carboxylic acid passivation material is disclosed. The method comprising the steps of: mixing the desiccant compound, applying the desiccant compound to a surface, curing the desiccant compound, and conditioning the desiccant compound by allowing the desiccant compound to absorb a carboxylic acid passivation material. The desiccant compound formed by mixing a polymer binder selected from the group consisting of polysaccharides, polyamines, polyamides, and polysulfones with a drying agent at a polymer to drying agent weight ratio of 1:2.1 to 1:100.

According to another embodiment the cured desiccant compound is conditioned by heating the desiccant compound in the presence of a vacuum and exposing the desiccant compound to the carboxylic acid passivation material.

According to another embodiment the cured desiccant compound is heated in the presence of a vacuum and subsequently sealed inside a device containing a solid passivation material such as PFDA that has been delivered by any other method. Heating of the sealed device causes the passivant to be absorbed by the getter material *in situ*.



According to yet another embodiment of the disclosed invention, an image projection system is disclosed. The image projection system comprises a light source providing a beam of light along a light path, a micromirror on the light path, the micromirror device selectively reflecting portions of the beam of light in response to image data and control signals, and projection optics receiving the selectively reflected portions of the beam of light and focusing the selectively reflected portions of the beam of light onto an image plane. The micromirror device in the projection system comprising, a micromechanical machine; a package enclosing the micromechanical machine, and a desiccant compound enclosed by the package. The desiccant compound is able to reversibly absorb a carboxylic acid passivation material. The desiccant compound comprising a polymer binder selected from the group consisting of polysaccharides, polyamines, polyamides, and polysulfones and a drying agent dispersed in the binder at a polymer to drying agent weight ratio of 1:2.1 to 1:100.

## BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

5       FIGURE 1 is a cross-section view of a packaged micromechanical device showing the presence of a desiccant compound providing a reversible source/sink for a surface treatment and a gettering function.

FIGURE 2 is a flow chart of the process of mixing, applying, curing, and conditioning the desiccant compound shown in Figure 1.

10       FIGURE 3 is a schematic view of a micromirror-based projection system utilizing the improved micromechanical device of Figure 1.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A novel getter, or desiccant, compound and method is disclosed. The disclosed getter, or desiccant, compound **102**, shown in Figure 1, performs a desiccation function as well as providing a reversible source/sink of passivation material in a headspace **104** in which a micromechanical device **106** is enclosed. While the following description describes its use with a PFDA surface treatment material and micromirror device, these examples are for illustration purposes and in no way limit the intended scope of the disclosed invention. The disclosed technology is ideal for any micromechanical device used with an acidic passivant.

The disclosed desiccant compound has two primary components, a polymer and a drying agent. The polymer acts as both a source and a sink for the surface passivation material, and holds the drying agent in place. The drying agent absorbs water vapor present in the enclosure.

Several classes of polymers are available for use in the disclosed desiccant compound. The preferred polymers react with the carboxylic acid passivant available in the package headspace to regulate the amount of passivant vapor available in the package headspace. Specific examples of polymers include polysaccharides (including structural polysaccharides such as cellulose, hydroxypropylcellulose, chitin, their functional derivatives, and others well known to practitioners of the art), polyamines such as poly(2-vinylpyridine), poly(4-vinylpyridine), copolymers of 2-vinylpyridine and 4-vinylpyridine, polyamides such as poly(vinylpyrrolidone), and polysulfones such as poly(p-phenylene sulfone).

Polymers such as polysaccharides, polyamines, polyamides, and polysulfones are basic in nature. Although the conjugate acids of these polymers may have very low  $pK_a$  values, their base strengths are sufficient to allow a Brønsted acid-base interaction with the envisioned passivants.

The passivation materials envisioned, PFDA and similar carboxylic acids, are acidic. This

allows the polymer and passivation material to interact through an acid-base reaction. When acting as a sink for the passivation material, the polymer accepts a proton from a gas phase carboxylic acid, thereby absorbing the carboxylic acid.

The absorbed carboxylic acid can later be released intact by deprotonation of the polymer. Thus, the polymer is a significant source of carboxylic acid passivation materials. Through the constant protonation/deprotonation of the polymer, an equilibrium passivation material vapor pressure is established and maintained in the package headspace. The passivation material vapor reacts with the surfaces of the micromechanical device to replenish the oriented monolayer as it is worn away by contact between components of the micromechanical device.

In addition to providing a reversible source/sink for the passivation material, the polymer provides a binder for the drying agent needed to capture water vapor in the package headspace. The drying agent typically is a molecular sieve, preferably a powdered hydrated aluminosilicate (zeolite) material. Water molecules enter the pores of the molecular sieve where they are adsorbed.

Molecular sieve drying agents are ideal for use in micromirror devices because the adsorbed water vapor is tightly bound to the sieve across a wide temperature range. Micromirror devices are exposed to very intense light. The light elevates the temperature of the micromirror device to well above 100° C. Molecular sieves retain the adsorbed water vapor at temperatures around 300° C while many other drying agents tend to release the captured water vapor at temperatures above 100° C.

Since the polymer acts both as a binder and as a source/sink for the passivation material while the zeolite adsorbs water vapor, the polymer-zeolite mixture must provide enough polymer and zeolite to perform both functions. Typically, the zeolite-filled polymer desiccant compound

has a polymer to zeolite weight ratio of 1:100 to 1:2.1 in order provide sufficient polymer and zeolite. Preferably, the polymer to zeolite weight ratio range is 1:10 to 1:4.

The polymer-zeolite mixture may be mixed with a suitable carrier solvent prior to being dispensed onto the package or window. A suitable solvent is one that dissolves the host polymer and evaporates without leaving harmful residue. A 2:1 to 1:100 solid to solvent weight ratio typically is used. Preferably, the solid to solvent weight ratio is 1:1 to 1:10.

Depending on the application, the polymer-zeolite mixture **102** is extruded onto a package substrate **108**, a package lid or window **110**, or a spacer ring **112**. The mixture **102** is applied in dots, strips, or any other shape or form that does not interfere with the operation of the device. For example, if the mixture is applied to the package window **110** it must be kept clear of the aperture through which light must pass. If desired, the polymer-zeolite mixture is applied directly to a surface enclosed by the package headspace without the use of a solvent.

Figure 2 is a flowchart showing the steps of applying the polymer-zeolite mixture. The polymer, zeolite, and a solvent if necessary, are mixed in step **202** and applied to a package surface in step **204**. The polymer-zeolite mixture is cured in step **206**. The cure process **206** is preferably performed at an elevated temperature and in the presence of a vacuum in order to remove all traces of solvent from the polymer-zeolite mixture. Alternatively, the cure process **206** is performed at room temperature.

After the polymer-zeolite mixture is cured, it is conditioned in step **208** to set the initial moisture content of the zeolite mixture. The conditioning step **208** typically comprises heating the polymer-zeolite mixture in the presence of a vacuum to remove as much water vapor from the zeolite as possible.

The conditioning step **208** may also expose the polymer-zeolite mixture to PFDA vapor. As described above, PFDA from the vapor is absorbed by the polymer to pre-load the polymer. Once the polymer is saturated with PFDA the package is sealed as indicated by step **210**. Alternatively, solid PFDA is deposited in the package by other means, and the package sealed as indicated by step **210**. After the sealing step, the package is heated, causing the solid PFDA to be absorbed by the desiccant compound.

Figure 3 is a schematic view of an image projection system **300** using an improved micromirror **302** according to the present invention. In Figure 8, light from light source **304** is focused on the improved micromirror **302** by lens **306**. Although shown as a single lens, lens **306** is typically a group of lenses and mirrors which together focus and direct light from the light source **304** onto the surface of the micromirror device **302**. Image data and control signals from controller **314** cause some mirrors to rotate to an on position and others to rotate to an off position. Mirrors on the micromirror device that are rotated to an off position reflect light to a light trap **308** while mirrors rotated to an on position reflect light to projection lens **310**, which is shown as a single lens for simplicity. Projection lens **310** focuses the light modulated by the micromirror device **302** onto an image plane or screen **312**.

Thus, although there has been disclosed to this point a particular embodiment for a getter, or desiccant compound, for enhanced performance of micromechanical devices and method therefore, it is not intended that such specific references be considered as limitations upon the scope of this invention except insofar as set forth in the following claims. Furthermore, having described the invention in connection with certain specific embodiments thereof, it is to be understood that further modifications may now suggest themselves to those skilled in the art, it is intended to cover all such modifications as fall within the scope of the appended claims.

WHAT IS CLAIMED IS:

1. A desiccant compound able to reversibly absorb a carboxylic acid passivation material, said desiccant compound comprising:
  - a polymer binder selected from the group consisting of polysaccharides, polyamines, polysulfones, and polyamides;
  - a drying agent dispersed in said binder; and
  - said polymer to drying agent weight ratio being 1:2.1 to 1:100.
2. The compound of Claim 1, wherein said drying agent is a molecular sieve.
3. The compound of Claim 1, wherein said drying agent is a zeolite.
4. The compound of Claim 1, said polymer to said drying agent weight ratio being 1:4 to 1:10.
5. The compound of Claim 1, further comprising:
  - a solvent, said polymer and said drying agent to solvent weight ratio being 2:1 to 1:100.
6. The compound of Claim 1, wherein said polymer is a structural polysaccharide.
7. The compound of Claim 1, wherein said polymer is selected from the group consisting of cellulose, hydroxypropylcellulose, chitin, and their functional derivatives.
8. The compound of Claim 1, wherein said polymer is poly(vinylpyrrolidone).
9. The compound of Claim 1, wherein said polymer is selected from the group consisting of poly(2-vinylpyridine), poly(4-vinylpyridine), and copolymers of 2-vinylpyridine and 4-vinylpyridine.
10. The compound of Claim 1, wherein said polymer is poly(p-phenylene sulfone).
11. The compound of Claim 1, further comprising:

a carboxylic acid passivation material, said carboxylic acid passivation material absorbed by said polymer.

12. The compound of Claim 11, wherein said carboxylic acid passivation material is a perfluoroalkanoic acid.
13. The compound of Claim 11, wherein said carboxylic acid passivation material is perfluorodecanoic acid.
14. A device comprising:
  - a micromechanical machine;
  - a package enclosing said micromechanical machine; and
  - a desiccant compound enclosed by said package, said desiccant compound able to reversibly absorb a carboxylic acid passivation material, said desiccant compound comprising:
    - a polymer binder selected from the group consisting of polysaccharides, polyamines, polysulfones, and polyamides;
    - a drying agent dispersed in said binder; and
    - said polymer to drying agent weight ratio being 1:2.1 to 1:100.
15. The device of Claim 14, wherein said drying agent is a molecular sieve.
16. The device of Claim 14, wherein said drying agent is a zeolite.
17. The device of Claim 14, said polymer to said drying agent weight ratio being 1:4 to 1:10.
18. The device of Claim 14, further comprising:
  - a solvent, said polymer and said drying agent to solvent weight ratio being 2:1 to 1:100.
19. The device of Claim 14, wherein said polymer is a structural polysaccharide.



20. The device of Claim 14, wherein said polymer is selected from the group consisting of cellulose, hydroxypropylcellulose, chitin, and their functional derivatives.
21. The device of Claim 14, wherein said polymer is poly(vinylpyrrolidone).
22. The device of Claim 14, wherein said polymer is selected from the group consisting of poly(2-vinylpyridine), poly(4-vinylpyridine), and copolymers of 2-vinylpyridine and 4-vinylpyridine.
23. The device of Claim 14, wherein said polymer is poly(p-phenylene sulfone).
24. The device of Claim 14, further comprising:  
a carboxylic acid passivation material, said carboxylic acid passivation material absorbed by said polymer.
25. The device of Claim 24, wherein said carboxylic acid passivation material is a perfluoroalkanoic acid.
26. The device of Claim 24, wherein said carboxylic acid passivation material is perfluorodecanoic acid.
27. A method of applying a desiccant compound able to reversibly absorb a carboxylic acid passivation material, said method comprising the steps of:  
mixing said desiccant compound, said mixing comprising mixing:  
a polymer binder selected from the group consisting of polysaccharides, polyamines, polysulfones, and polyamides; and  
a drying agent dispersed in said binder, said polymer to drying agent weight ratio being 1:2.1 to 1:100;  
applying said desiccant compound to a surface; and  
curing said desiccant compound.

28. The method of Claim 27, further comprising the step of:
- conditioning said desiccant compound by allowing said desiccant compound to absorb a carboxylic acid passivation material.
29. The method of Claim 27, further comprising the step of:
- conditioning said desiccant compound by allowing said desiccant compound to absorb a perfluoroalkanoic acid passivation material.
30. The method of Claim 27, further comprising the step of:
- conditioning said desiccant compound by allowing said desiccant compound to absorb a perfluorodecanoic acid passivation material.
31. The method of Claim 27, said curing step comprising heating said desiccant compound in the presence of a vacuum.
32. The method of Claim 27, said conditioning step comprising heating said desiccant compound in the presence of a vacuum.
33. The method of Claim 27, said conditioning step comprising the steps of:
- heating said desiccant compound in the presence of a vacuum; and
- exposing said desiccant compound to said carboxylic acid passivation material.
34. The method of Claim 27, said conditioning step comprising the steps of:
- heating said desiccant compound in the presence of a vacuum; and
- depositing said carboxylic acid passivation material in solid form directly in a package; and
- sealing said package; and
- heating said package so that said carboxylic acid passivation material is absorbed into said desiccant compound.

35. The method of Claim 27, said mixing step comprising the step of mixing:
- a polymer binder selected from the group consisting of polysaccharides, polyamines, polysulfones, and polyamides;
  - a drying agent dispersed in said binder, said polymer to drying agent weight ratio being 1:2.1 to 1:100; and
  - a solvent, wherein said polymer and said drying agent to solvent weight ratio is 2:1 to 1:100.
36. The method of Claim 27, said mixing step comprising the step of mixing:
- a polymer binder selected from the group consisting of polysaccharides, polyamines, polysulfones, and polyamides;
  - a drying agent dispersed in said binder, said polymer to drying agent weight ratio being 1:2.1 to 1:100; and
  - a solvent, wherein said polymer and said drying agent to solvent weight ratio is 1:1 to 1:10.
37. The method of Claim 27, said mixing step comprising the step of mixing:
- a structural polysaccharide; and
  - a drying agent dispersed in said binder, said structural polysaccharide to drying agent weight ratio being 1:2.1 to 1:100.
38. The method of Claim 27, said mixing step comprising the step of mixing:
- a polymer selected from the group consisting of cellulose, hydroxypropylcellulose, chitin, and their functional derivatives; and
  - a drying agent dispersed in said binder, said polymer to drying agent weight ratio being 1:2.1 to 1:100.

39. The method of Claim 27, said mixing step comprising the step of mixing:
- poly(vinylpyrrolidone); and
  - a drying agent dispersed in said binder, said poly(vinylpyrrolidone) to drying agent weight ratio being 1:2.1 to 1:100.
40. The method of Claim 27, said mixing step comprising the step of mixing:
- a polymer selected from the group consisting of poly(2-vinylpyridine), poly(4-vinylpyridine), and copolymers of 2-vinylpyridine and 4-vinylpyridine; and
  - a drying agent dispersed in said binder, said polymer to drying agent weight ratio being 1:2.1 to 1:100.
41. The method of Claim 27, said mixing step comprising the step of mixing:
- poly(p-phenylene sulfone); and
  - a drying agent dispersed in said binder, said poly(p-phenylene sulfone) to drying agent weight ratio being 1:2.1 to 1:100.
41. An image projection system comprising:
- a light source providing a beam of light along a light path;
  - a micromirror on said light path, said micromirror device selectively reflecting portions of said beam of light in response to image data and control signals, said micromirror device comprising:
    - a micromechanical machine;
    - a package enclosing said micromechanical machine; and
    - a desiccant compound enclosed by said package, said desiccant compound able to reversibly absorb a carboxylic acid passivation material, said desiccant compound comprising:

a polymer binder selected from the group consisting of  
polysaccharides, polyamines, polysulfones, and polyamides;

a drying agent dispersed in said binder; and

wherein said polymer to drying agent weight ratio is 1:2.1 to 1:100

projection optics receiving said selectively reflected portions of said beam of light and  
focusing said selectively reflected portions of said beam of light onto an image plane.

43. The image projection system of Claim 42, wherein said drying agent is a molecular sieve.
44. The image projection system of Claim 42, wherein said drying agent is a zeolite.
45. The image projection system of Claim 42, said polymer to said drying agent weight ratio being 1:4 to 1:10.
46. The image projection system of Claim 42, wherein said polymer is a structural polysaccharide.
47. The image projection system of Claim 42, wherein said polymer is selected from the group consisting of cellulose, hydroxypropylcellulose, chitin, and their functional derivatives.
48. The image projection system of Claim 42, wherein said polymer is poly(vinylpyrrolidone).
49. The image projection system of Claim 42, wherein said polymer is selected from the group consisting of poly(2-vinylpyridine), poly(4-vinylpyridine), and copolymers of 2-vinylpyridine and 4-vinylpyridine.
50. The image projection system of Claim 42, wherein said polymer is poly(p-phenylene sulfone).
51. The image projection system of Claim 42, further comprising:

a carboxylic acid passivation material, said carboxylic acid passivation material absorbed by said polymer.

52. The image projection system of Claim 51, wherein said carboxylic acid passivation material is a perfluoroalkanoic acid.
53. The image projection system of Claim 51, wherein said carboxylic acid passivation material is perfluorodecanoic acid.

## ABSTRACT

A desiccant compound, image projection system using the desiccant compound, and a method for utilizing the desiccant compound. The desiccant compound formed by mixing (202) a polymer binder selected from the group consisting of polysaccharides (including without  
5 limitation structural polysaccharides such as cellulose, chitin, and their functionalized derivatives), polyamines, polysulfones, and polyamides with a drying agent, typically a zeolite, at a polymer to drying agent weight ratio of 1:2.1 to 1:100, or 1:4 to 1:10. After the desiccant compound is mixed (202) it is applied (204) to a surface and cured (206), often through the application of heat and vacuum. The cured desiccant compound is conditioned (208) and the  
10 package is sealed (210).

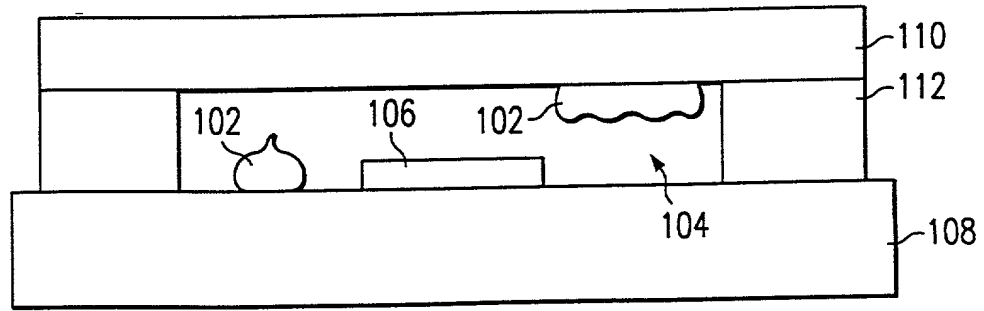


FIG. 1

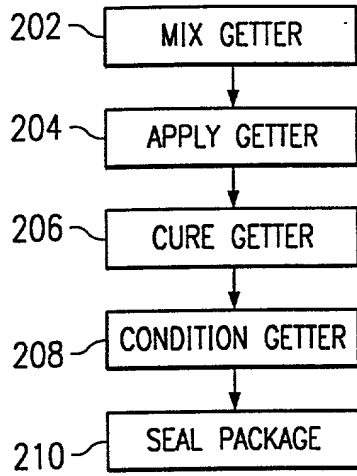


FIG. 2

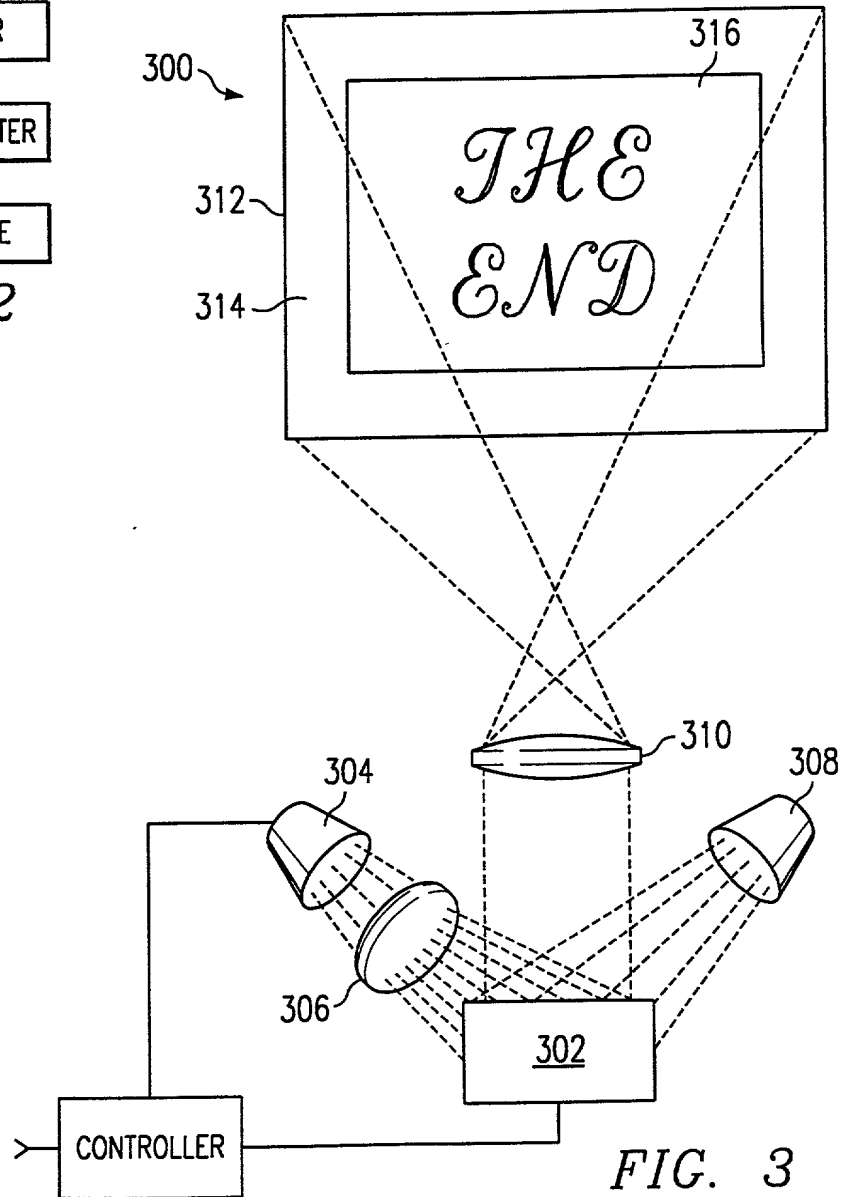


FIG. 3



ATTORNEY'S DOCKET NO.

TI-28505

**APPLICATION FOR UNITED STATES PATENT  
DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I declare that my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor if only one name is listed below, or an original, first and joint inventor if plural inventors are named below, of the subject matter which is claimed and for which a patent is sought on the invention entitled as set forth below, which is described in the attached specification; that I have reviewed and understand the contents of the specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration; that no application for patent or inventor's certificate on this invention has been filed by me or my legal representatives or assigns in any country foreign to the United States of America; and that I acknowledge my duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, section 1.56;

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

**TITLE OF INVENTION:**

**Getter for Enhanced Micromechanical Device Performance**

**POWER OF ATTORNEY:** I HEREBY APPOINT THE FOLLOWING ATTORNEYS TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH:

Charles A. Brill, Reg. No. 37,786; Robert D. Marshall, Reg. No. 28,527; Robby T. Holland, Reg. No. 33,304; Carlton H. Hoel, Reg. No. 29,934; Frederick J. Telecky, Jr., Reg. No. 29,979; William B. Kempner, Reg. No. 28,228; Jay M. Cantor, Reg. No. 19,906; and Richard L. Donaldson, Reg. No. 25,673.

**SEND CORRESPONDENCE TO:**

Charles A. Brill  
Texas Instruments Incorporated  
P.O. Box 655474, MS 3999  
Dallas, Texas 75265

**DIRECT TELEPHONE CALLS TO:**

Charles A. Brill  
(972) 917-4379

**NAME OF INVENTOR:**

(1)

Simon Joshua Jacobs

**NAME OF INVENTOR:**

(2)

**NAME OF INVENTOR:**

(3)

**RESIDENCE &  
POST OFFICE ADDRESS:**

232 Forestview Drive  
Lucas, Texas 75002

**RESIDENCE &  
POST OFFICE ADDRESS:**

**RESIDENCE &  
POST OFFICE ADDRESS:**


**COUNTRY OF CITIZENSHIP:**

U.S.A.

**COUNTRY OF CITIZENSHIP:**

**COUNTRY OF CITIZENSHIP:**

**SIGNATURE OF INVENTOR:**



**SIGNATURE OF INVENTOR:**

**SIGNATURE OF INVENTOR:**

**DATE:**

10/27/98

**DATE:**

**DATE:**